



Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
CCO-120 L CW 400V 3N 50Hz

19045325

12/06/2024

DENOMINATION:

Compact rack conveyor 120 racks/hour with entrance from the left for cold water

DESCRIPTION :

- All the main parts are manufactured in AISI-304 anti-corrosion stainless steel: tanks, washing and rinsing arms, rinsing jets, doors, basket conveyance system, boiler and metal tubes.
 - Upwards-opening double panel door.
 - Tank tray filters made of AISI-304 stainless steel, easy to access and remove for cleaning and access to the tank.
 - Safety filter for pump suction.
 - Rinsing boiler with heat insulation.
 - Easy access for installation. Electrovalve located on one side (no need to remove panels to connect the machine).
 - Electrical panel designed for easy connection of dosers for liquid and solid detergents, rinse aid, limit switches, supplementary emergency stop button.
 - Washing arms easily removable as a set, for cleaning, with a plug on each branch providing access for cleaning inside.
 - Rinse jets easily dismountable and removable.
 - System of electronic regulation of speeds by means of frequency shifter.
 - Configurable electronic temperature control:
 - Wash (50 - 65 °C)
 - Rinse (70 - 85 °C)
 - Guarantee of rinse at 85 °C.
 - Pressure regulator for flow control.
 - Emergency stop button incorporated.
 - Extra anti-entrapment protection system at the entrance, mounted on the AS-260 splash guard supplement (optional).
 - Open door blocking system.
 - IPX4 protection system.
 - System for detection of blockage of conveyor carriage and automatic reverse function.
 - Energy-saving system: reduces consumption by halting operation of the pumps, and by passing the heating of the rinse to stand-by mode (70 °C).
 - Auto-timer which deactivates the conveyor motor after a pre-set period of inactivity (10 minutes)."
 - High-power washing system with 4 upper and 4 lower washing branches.
 - Double effect rinse.
 - 3 programs 80, 100 and 120 baskets/hour.
- Entry through the left part of the machine.
CW: Model prepared for connection with cold water from the network (input temperature $< < < > 50 \text{ }^\circ\text{C}.$)

POSSIBLE OPTIONS :

- Electric transformation to 230V three-phase without neutral (230V 3 ~)
- Electric transformation to marine version (440V 3~ 60 Hz.)
- Drying tunnel
- Anti-splash guard supplement (enter)
- Conveyor recovery system
- Anti-splash guard supplement (exit)

POSSIBLE ACCESSORIES :

DIMENSIONS



X Width	1180 mm	X Gross width	1530 mm
Y Depth	790 mm	Y Gross depth	955 mm
Z Height	1560 mm	Z Gross height	1950 mm
Net Weight	211,0 kg	Gross Weight	306,0 kg
Net volume	2,225 m ³	Gross volume	2,849 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	28,550 kW
Voltage	400V
Phases	3N
Electric frequency	50Hz
Amperage (A)	46,9
Engine power	1,40 kW
Heating power	27,00 kW

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 200-400kPa(2-4bar)
Water max consumption	210,00 L/h
Maximum Temperature	Water Inlet Max Temp:60°C

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	3X25+T - 100 A
Three-phase +N 400V wiring	4X16+T - 63 A
Drain 1 diameter	38





Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
CCO-120 L CW 400V 3N 50Hz

19045325

12/06/2024

- BASKETS
- BASKETS FOR DISHWASHERS
- BASKETS FOR GLASSES
- MODULAR ELEMENTS
- TABLES FOR RACK TYPE DISHWASH.

SUPPLIED ACCESSORIES:

- 19000484 Glass basket, 500x500x110 mm. 2
- 19000487 Basket for 16-18 plates, 500x500x110 mm. 2
- 19000488 Baskets for 16 glasses and cups with 110 mm diameter and 100 mm height. 1
- 19036306 Standard basket with dense base 1




Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
CCO-120 L CW 400V 3N 50Hz

19045325

12/06/2024

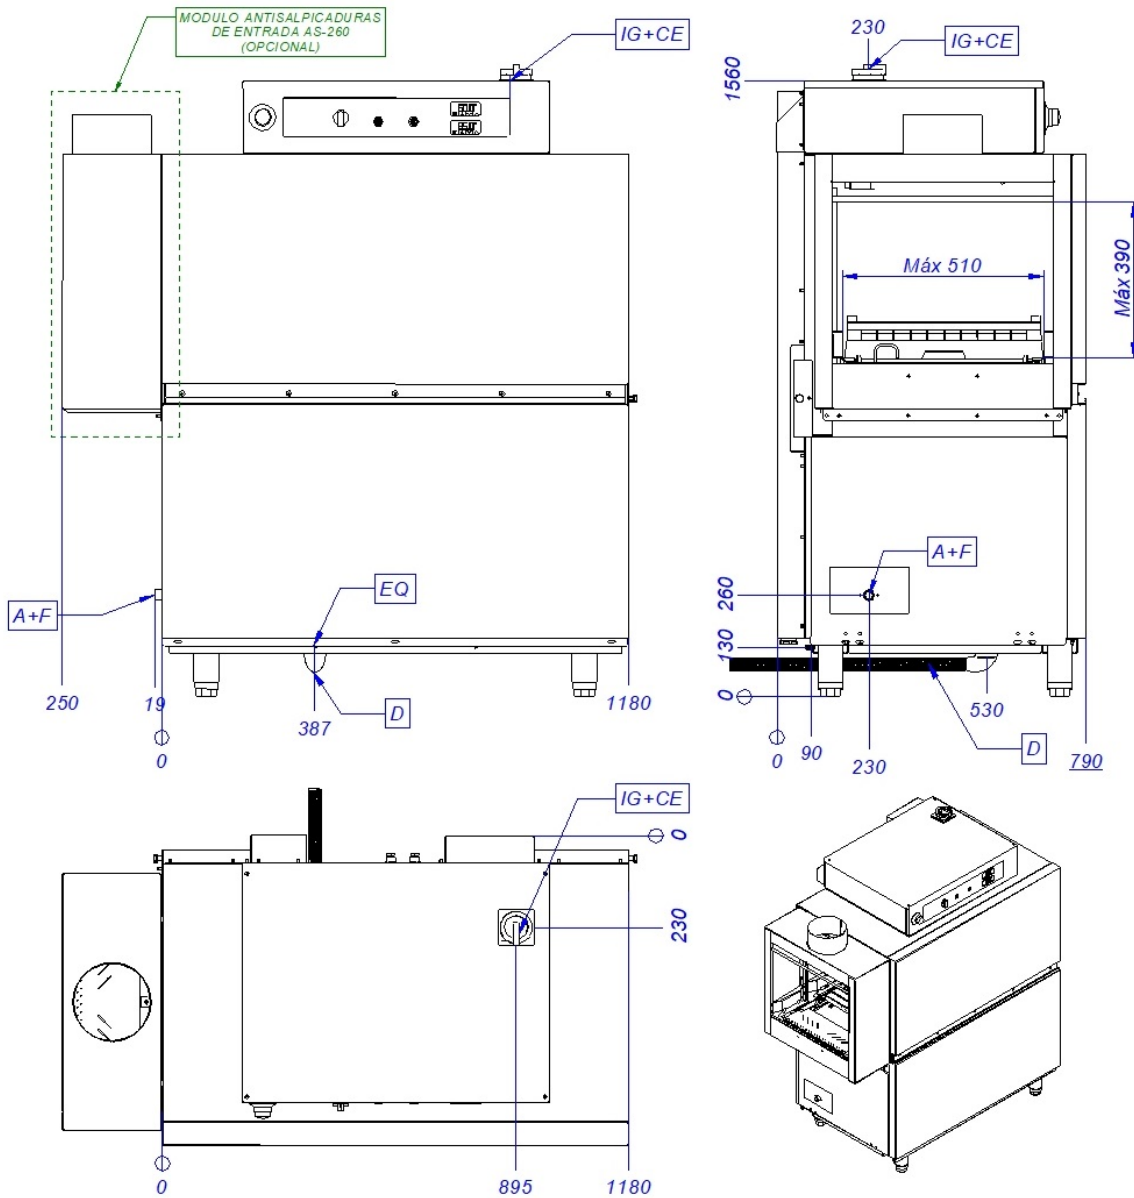

A+F	Entrada de agua + filtro	Water inlet & filter	Arrivée d'eau et filtrer
CE	Alimentación eléctrica	Power supply	Connexion électrique
D	Desagüe	Drain	Vindage
EQ	Toma equipotencial	Equipotential bonding terminal	Connexion Équipotentielle
IG	Interruptor general	General switch	Interrupteur général



Catálogo
FOOD SERVICE
Capítulo
LAVADO DE VAJILLA

Modelo Específico
CDT-600 380-415V 3N 50/60Hz

19046516

12/06/2024

DENOMINACIÓN:


Túnel de secado

DESCRIPCIÓN :

- Construcción en acero inoxidable.
- Elemento suplementario con caja con resistencias de 9 kW y ventilador superior para el secado de la vajilla con motor de 0,55 kW.
- Módulo con sistema de arrastre incluido, para colocar al final de la máquina.
- Dotado de cortinas separadoras.
- Estante inferior.
- No se puede instalar en un lavavajillas dotado de antisalpicaduras de salida (ASE-260).
- Se puede instalar como máximo un secado por máquina.

DIMENSIONES

X Ancho	600 mm	X Ancho bruto	630 mm
Y Fondo	790 mm	Y Fondo bruto	955 mm
Z Alto	1930 mm	Z Alto bruto	2200 mm
Peso neto	70,0 kg	Peso bruto	105,0 kg
Volumen neto	0,572 m3	Volumen bruto	1,324 m3



ESPECIFICACIONES TÉCNICAS ELECTRICIDAD

Potencia eléctrica	9,550 kW
Voltaje	380-415 V
Fases	3N
Frecuencia eléctrica	50/60Hz
Amperaje (A)	25A
Potencia motor	0,55 kW
Potencia calentamiento	9,00 kW

ESPECIFICACIONES TÉCNICAS FRÍO

Nivel de ruido	72,00 dB
----------------	----------

ESPECIFICACIONES TÉCNICAS ACOMETIDAS

Cableado 400V Trifásico+N	+ 9 KW
---------------------------	--------



Catálogo
FOOD SERVICE
Capítulo
LAVADO DE VAJILLA

Modelo Específico
CDT-600 380-415V 3N 50/60Hz

19046516

12/06/2024

